



## ASP SERIES: - SANDWICH PREP REFRIGERATOR SERIES







## **ASP Series**

### **FEATURES:**

- Austwide's ASP range of Sandwich Pre refrigerators are designed with the commercial kitchen in mind.
- Operating Temperature +o° to +10° C @ Climate class 4
- Salad and Sandwich prep table
- Stainless steel series 430 exterior doors, lids, fronts and sides
- Self-closing hinged doors with 90° stay open feature
- Interior wall louvers provide complete circulation to preserve freshness
- Compartment barrier prevents food spillage down to storage area
- Lift off compartment door hinges for easy cleaning
- LED digital temperature display
- PVC coated adjustable wire shelves
- Self-contained system, simple installation
- Pans and cutting boards are included
- The equipment is intended for use in an area where the environmental conditions are controlled and maintained such that the ambient temperature typically does not exceed 30°C.

MAIN DATA	Specifications are subject to change without notice. E&OE.
-----------	--

Model	Doors	Net Volume (L)	Shelves	Height (mm)	Width (mm)	Depth (mm)	Voltage	Amps	Cord Length	Shipping Weight
ASP775	1	160	1	1075	698	750	240v/50hz		2.4	80kg
ASP1225	2	268	2	1075	1188	750	240v/50hz		2.4	115kg
ASP1555	2	428	2	1075	1529	750	240v/50hz		2.4	158kg
ASP1800	3	440	3	1075	1787	750	240v/50hz		2.4	175Kg

Head Office: Unit 1/35 Rimfire Drive ,Hallam, Vic 3803. Phone: 1800 813 987 Fax: 03 8786 3572 Email: sales@austwiderentals.com websites: www.austwidesales.com.au or austwiderentals.com





# ASP SERIES: - SANDWICH PREP REFRIGERATOR SERIES

### **Specification**

- Shelves: 1 adjustable, PVC coated, steel shelve per door.
- Construction: 430 Stainless Steel doors, front, inner tray and sides provide a clean and dent resistant cabinet. Clear anodized aluminium back. Interior white powder coated aluminium for hygienic easy to clean surfaces.
- Insulation: 60mm high density polyurethane foam, Blowing agent, Cyclopentane for CFC free Ozone protection and superior insulating properties.
- Door: 60mm high pressure injected polyurethane foam. Designed with recessed handle provides easy access.
- Gasket: PVC welded one piece magnetic gasket. Removable without tools for easy cleaning.
- **Hinging:** Self closing with 90° dwell open.
- Electrical: Units come ready for connection to 240volt 50hz 10amp GPO. Single
  Outlet. It is recommended that a dedicated
  GPO be used.
- Electronic Controller: Italian designed and Manufactured, Carel temperature

- controller. Fitted with 30amp external compressor relay.
- Refrigeration System: Fully balanced self-contained condensing unit with forced draught evaporator.
- Compressor: ASR's equipment is fitted with <u>EMBRACO</u> compressors, the world leader in domestic and light commercial compressors.
- Refrigerant: R134a.
- Defrost: Timed forced electric defrost.
   Utilizing no-cost hot gas condensate disposal.
- Evaporator: Epoxy coated to minimize the potential of corrosion and thus future gas
- Castors: 125mm heavy duty castors.
   Front locking.
- Digital Temperature readout.
- Warranty<sup>1</sup>: Austwide's Manufacturers warranty 12 month parts and labour.

#### **Options:**

- 6" legs.
- 304 Stainless steel construction. (non inventory items).

### **Outstanding Benefits**


- Inclusions: Fitted with oversized Nylon cutting board, complete set of 1/6 gastronorm pots.
   Hinged insulated flat covers.
- Pots Included:

ASP775  $- 6 \times 1/6 + 2 \times 1/9$ ASP1225  $- 12 \times 1/6$ 

ASP1555 — 16 x 1/6

ASP1800 — 18 x 1/6

## ELEVATIONS. (not to scale)

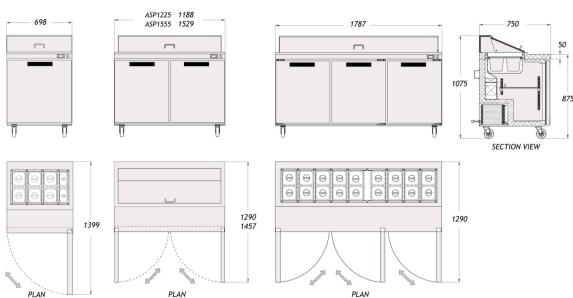

Head Office: Unit 1/35 Rimfire Drive ,Hallam, Vic 3803. Phone: 1800 813 987 Fax: 03 8786 3572 Email: sales@austwiderentals.com websites: www.austwidesales.com.au or austwiderentals.com