



AFS400 :- Single Door Freezer Merchandiser



AFS400

FEATURES:

- Operating Temperature -17° to -23° C @ ambient temperature of 32° C
- Only requires one standard power point (GPO):- 240V 50Hz 10 amp.
- Digital Temperature Display.
- 4 Individual adjustable shelves maximizing display configurations.
- Ticket Strip fitted to each shelf.
- Individual light switches to interior and signage plus LED interior lighting to lower power consumption.
- Low voltage heated glass door.
- Aluminium Framed doors with locks.
- Positive seal torsion bar self closing doors for low maintenance.
- Commercial castors, for ease of cabinet movement.
- Cyclic defrost with timed backup insures frost free refrigeration.
- Auto hot gas condensate removal requires no pumping.
- Illuminated signage. Supplied with blank opaque infill.

MAIN DATA

Specifications are subject to change without notice. E&OE.

Model	Doors	Volume (Gross lts)	Shelves	Height (mm)	Width (mm)	Depth (mm)	Voltage	Power Outlet	Cord Length	Shipping Weight
AFS400	1	447	4	2070	690	665	240v/50hz	10amp	2.4	171kg

Head Office: Unit 1/35 Rimfire Drive ,Hallam, Vic 3803. Phone: 1800 813 987 Fax: 03 8786 3572
Email: sales@austwiderentals.com websites: www.austwidesales.com.au or austwiderentals.com



AFS400 :- Single Door Freezer Merchandiser

Specification

- **Shelves:** 4 height adjustable, PVC coated, shelves. 4 stainless steel shelf clips per shelf fit to stainless steel shelf posts.
- **Lighting:** Hi-tek LED vertical lighting provides energy efficient lights
- **Refrigeration System:** Fully balanced self contained condensing unit with forced draught evaporator and condenser.
- **Refrigerant:** R404A.
- **Defrost:** Auto defrost, with no-cost, hot gas condensate disposal. Provides frost free low maintenance.
- **Electronic Controller:** Italian designed and Manufactured electronic control. Includes high temp alarm.
- **Evaporator:** Epoxy coated to minimize the potential of corrosion and thus future gas leaks.
- **Operation conditions:** -17° to -23° C. at 25° C ambient.
- **Electrical:** Units come ready for connection to 240volt 50hz 10amp GPO. Single Outlet. It is recommended that a dedicated GPO be used.
- **Construction:** Corrosion resistant white painted steel interior. The

exterior has white baked on enamel finish.

- **Insulation:** 50mm high density polyurethane foamed in place, Blowing agent, Cyclopentane for CFC free Ozone protection and superior insulating properties. .
- **Door:** Heated glass constructed with aluminium frame and fitted with locks.
- **Hinging:** Self closing torsion spring.
- **Gasket:** PVC welded one piece magnetic gasket. Removable without the need for tools.
- **Castors:** 4 (2 x locking) x 75mm swivel commercial castors.
- **Model Features:** Digital Temperature readout.
- **Warranty¹:** Austwide's Manufacturers warranty 12 month parts and labour. See terms and conditions of sale for full description.
- **Optional Extras:**
 - Additional Shelves.
 - Livery to sides and illuminated sign.

Outstanding Benefits


- **Condensing unit:** Bottom mounted placing the unit in the coolest position, close to the floor, which puts less strain on the refrigeration system providing longer life and greater efficiency.

tion, close to the floor, which puts less strain on the refrigeration system providing longer life and greater efficiency.


- **Optimal product placement:** The AFS400 lifts the product off the floor, placing it in the optimal position for your customers to easily reach in and retrieve without the need to stoop down excessively.
- **Energy Saving features:** LED lighting to interior. Individual light switches for illuminated sign and interior.

ELEVATIONS. (not to scale)

1.terms and conditions apply. Visit web site for full details. www.austwidesales.com.au
Specifications are subject to change without notice. E&OE.

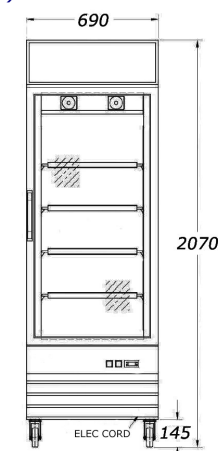

FRONT ELEVATION

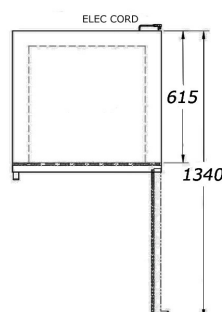

PLAN ELEVATION

Head Office: Unit 1/35 Rimfire Drive ,Hallam, Vic 3803. Phone: 1800 813 987 Fax: 03 8786 3572
Email: sales@austwiderentals.com websites: www.austwidesales.com.au or austwiderentals.com