

SHAMROCK



by

Austwide
sales and rentals pty ltd

ASR:- UPRIGHT STORAGE REFRIGERATOR SERIES



ASR Series

FEATURES:

- SHAMROCK 's upright storage refrigerators are designed for the commercial kitchen .
- General operating Temperature 0°- 5° C @ 43° C.
- Only requires one a standard power point (GPO):- 240V 50Hz 10 amp.
- Digital Temperature Display.
- 4 height adjustable shelves per door. Individual shelves behind each door maximizes storage configurations.
- Stainless steel doors and outer sides. With powder coated aluminum inner walls and clear anodized aluminum outer back.
- Stainless steel internal floor with coved corners allows for easy cleaning and sanitizing.
- 50mm high pressure injected polyurethane foam.
- Extra Large castors, for ease of cabinet movement.
- Solid Door, Designed with one piece full length handle and self closing torsion bar hinging.
- Heavy duty one piece gasket, replaceable without tools.
- Automatic energy efficient hot gas condensate disposal. No drainage required.

MAIN DATA

Specifications are subject to change without notice.

Model	Doors	Volume (Gross lts)	Shelves	Height (mm)	Width (mm)	Depth (mm)	Voltage	Power Outlet	Cord Length	Shipping Weight
ASR680	1	510	4	2100	680	830	240v/50hz	10amp	2.4	165kg
ASR1370	2	1130	8	2100	1370	830	240v/50hz	10amp	2.4	235kg
ASR2055	3	1750	12	2100	2055	830	240v/50hz	10amp	2.4	304Kg

Head Office: Unit 1/35 Rimfire Drive ,Hallam, Vic 3803. Phone: 1800 813 987 Fax: 03 8786 3572
Email: sales@austwiderentals.com websites: www.austwidesales.com.au or austwiderentals.com

SHAMROCK

by

Austwide
sales and rentals pty ltd

ASR:- UPRIGHT STORAGE REFRIGERATOR SERIES

Outstanding Benefits

Optimal product placement: The SR Series lifts the product off the floor, placing it in the optimal position for your staff to easily reach in and retrieve without the need to bend down excessively.

Bottom Mounted Condensing unit: The ASR Series places the condenser in the coolest position, close to the floor, which put less strain on the refrigeration system providing longer life and greater energy efficiency.

ASR Series includes: 1, 2, and 3 door refrigerators. The ACR Series is paired with the ASF Series of 1, 2 and 3 door freezers.

Specification



- **Shelves:** 4 height adjustable, PVC coated, shelves per door. Adjustable increments 25mm.
- **Operation conditions:** 0° to 5° C. at up to 40° C ambient.
- **Electrical:** Units come ready for connection to 240volt 50hz 10amp GPO. Single Outlet. It is recommended that a dedicated GPO be used.
- **Electronic Controller:** Italian de-

signed and Manufactured, Dixell SR20 temperature controller. Includes high temp alarm.

- **Construction:** Stainless Steel doors, front, inner tray and sides provide a clean and dent resistant cabinet. Clear anodized aluminum back. Interior white powder coated aluminum for hygienic easy to clean surfaces.
- **Insulation:** 50mm high density polyurethane foam, Blowing agent, Cyclopentane for CFC free Ozone protection and superior insulating properties.
- **Door:** Solid Stainless Steel outer, 50mm high pressure injected polyurethane foam. Designed with folded full length handle provides easy access.
- **Gasket:** PVC welded one piece magnetic gasket. Removable without the need for tools.
- **Hinging:** Self closing torsion bar.
- **Refrigeration System:** Fully balanced condensing unit with forced draught evaporator.
- **Refrigerant:** R134A.
- **Defrost:** Cyclic defrost, with no-cost, hot gas condensate disposal.
- **Evaporator:** Epoxy coated to minimize the potential of corrosion and thus future gas leaks.
- **Lighting:** Interior lights activated by rocker switches mounted above each door.
- **Castors:** 4 (2x locking) x 100mm swivel heavy duty castors.
- **Model Features:** Digital Temperature readout. Locks to each door
- **Warranty¹:** Austwide's Manufacturers warranty 12 month parts and labour. See terms and conditions of sale for full description.
- **Options:** Additional Shelves.

ELEVATIONS. (not to scale)

1. terms and conditions apply. Visit web site for full details. www.austwidesales.com.au

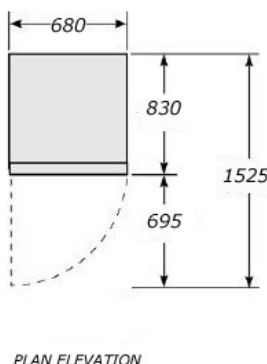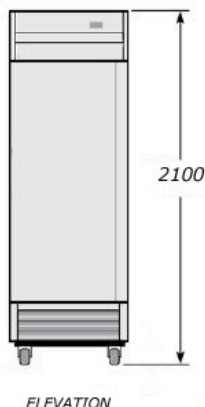

NOTE: excluding the width all dimensions on the Elevation and plan are common across the ASR Series.

Model	Width
ASR680	680mm
ASR1370	1370mm
ASR2055	2055mm

Head Office: Unit 1/35 Rimfire Drive ,Hallam, Vic 3803. Phone: 1800 813 987 Fax: 03 8786 3572
Email: sales@austwiderentals.com websites: www.austwidesales.com.au or austwiderentals.com