

Solid Door Reach-In Freezers

Model Numbers: CFD-1FF, CFD-2FF, CFD3FF

PARTNEZ REFRIGERATION™

offers standard features like door locks, factory-installed casters, copper-tubed evaporators and condensers, compressors from world leading manufactures in every refrigeration unit. See how PARTNEZ REFRIGERATION™'s simple solutions can enhance the cold storage options in your restaurant!

FEATURES

Easy-Access Doors

The ČFD Series doors utilise a self-closing design when open to less than 90° so there's no risk of energy or temperature loss. Open the doors over 90° and they are designed to stay. Perfect for loading and retrieving large items.

Stainless Steel

The CFD Range is built for foodservice professionals. Stainless steel fronts and sides keep the equipment looking their best. Stainless Steel inner floors have coved corners for easy cleaning.

Precision Refrigeration


The bottom mount compressor unit is controlled by a Carel solidstate thermostat with a digital display. The Embraco compressor is switched through an auxiliary contactor, to increase the life of the Carel controller.



Features at a Glance:

- Stainless steel series 430 exterior doors, fronts & Sides
- Stainless steel interior floor with coved corners
- Stucco aluminium back panel
- Recessed handles with ergonomic grip
- Self closing hinged doors with 90° stay open feature
- LED digital temperature display
- Illuminated interior
- Factory installed PVC coated adjustable steel shelves
- Door locks and keys for loss prevention
- Automatic defrost


- Removable door gaskets to allow cleaning
- ■Temperature range –18° to –22° C
- Standard 100mm industrial casters / front locking
- 60mm Energy-efficient polyurethane insulation
- Utilizes environmentally friendly R-404A refrigerant
- Shelves hold full size 2/1 Gastronorm trays
- Bottom mounted compressor for cooler running and ergonomic shelf positioning
- Door activated evaporator fan switches for increased energy efficiency







Model Numbers: CFD-1FF, CFD-2FF, CFD3FF

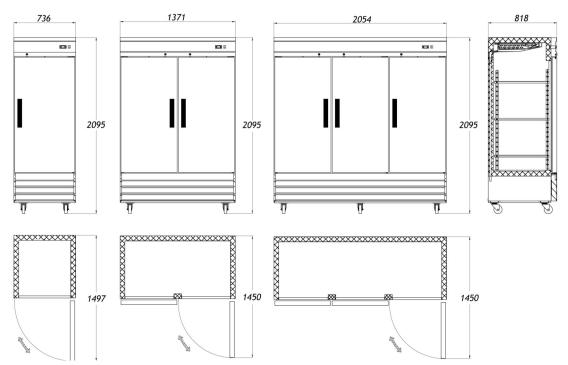

PRODUCT SPECIFICATIONS			
Model	CFD-1FF	CFD-2FF	CFD-3FF
External Dimensions (mm)	736w x 818d x 2095h	1371w x 818d x 2095h	2054w x 818d x 2095
Internal Dimensions	620w x 688d x 1530h	1255w x 688d x 1530h	1938w 688d x 1530h
Shipping Dimensions	800w x 880d x 2170h	1435w x 880d x 2170	2115w x 880d x 2170h
Capacity (L)	584	1170	1881
Inner Temperature	-18° ~ -22°C @ 40°C Ambient		
Doors	1	2	3
No. of Shelves	4	8	12
Refrigerant	R404A		
Compressor HP	Embraco		
Cooling Type	Ventilated		
Insulation Type	Polyurethane		
Temperature Control Type	Carel		
Amps (A) 240V/50hz	3.84	5.81	7.17
Net Weight (kg)	151	225	320

Visit our web site for more details. www.partnezrefrigeration.com.au Specifications are subject to change without notice. E&OE.