

SHAMROCK



by

Austwide
sales and rentals pty ltd

ABR:- BENCH REFRIGERATOR SERIES



ABR Series

FEATURES:

- SHAMROCK 's BENCH TOP REFRIGERATORS are designed with the commercial kitchen in mind.
- Operating Temperature 0° to +5° C. Climate Type T.
- Only requires one a standard power point (GPO):- 240V 50Hz 10 amp.
- Digital Temperature Display.
- 1 height adjustable shelf per door.
- Stainless steel doors and outer sides.
- Powder coated aluminum inner walls and clear anodized aluminum outer back.
- Stainless steel internal floor with coved corners allows for easy cleaning and sanitizing.
- Extra Large castors, for ease of cabinet movement.
- Solid Door, Designed with one piece full length horizontal handle and self closing torsion bar hinging.

MAIN DATA

Specifications are subject to change without notice. E&OE.

Model	Doors	Volume (Gross L)	Shelves	Dimensions w x d x h (mm)	Voltage	Power Outlet	Cord Length	Shipping Weight
ABR735	1	184	1	735x 760 x 910	240v/50hz	10amp	2.4	131kg
ABR1225	2	340	1	1225 x 760 x 910	240v/50hz	10amp	2.4	136kg
ABR1555	2	440	1	1555 x 760 x 910	240v/50hz	10amp	2.4	157Kg

Head Office: Unit 1/35 Rimfire Drive ,Hallam, Vic 3803. Phone: 1800 813 987 Fax: 03 8786 3572
Email: sales@austwiderentals.com websites: www.austwidesales.com.au or austwiderentals.com

SHAMROCK

by

Austwide
sales and rentals pty ltd

ABR:- BENCH REFRIGERATOR SERIES

Outstanding Benefits

- Fitted with full width doors, offering maximized face area for storing your inventory. This allows increased visibility and hence ergonomic picking of inventory. Hinged insulated flat covers.
- ABR Series Includes: 1,2 and 3 door refrigerators. The ABR Series is paired with the ABF Series of 1, 2, and 3 door freezers.

Specification

- Refrigeration System:** Fully balanced self contained condensing unit with forced draught evaporator.
- Condensing unit:** Located at rear. Unit access from back of cabinet. Quality castors allow easy roll out of cabinet allowing access to condenser for easy cleaning and maintenance.
- Refrigerant:** R134A.
- Defrost:** Cyclic defrost, with no-cost, hot gas condensate disposal. Supplemented with timed defrosts via electronic controller.
- Electronic Controller:** Italian designed, Dixell temperature controller and digital display. Includes high temp alarm.
- Evaporator:** Epoxy coated to eliminate the potential of corrosion and

thus future gas leaks.

- Shelves:** 2 height adjustable, PVC coated, shelves per door. 4 stainless steel shelf clips per shelf fit to stainless steel shelf posts.
- Operation conditions:** 0° to 5° C. at up to 40° C ambient.
- Electrical:** Units come ready for connection to 240volt 50hz 10amp GPO. Single Outlet. It is recommended that a dedicated GPO be used.
- Construction:** Stainless Steel doors, front and sides provide a clean and dent resistant cabinet. Clear anodized aluminum back. Interior white powder coated aluminum for hygienic easy to clean surfaces.
- Stainless Steel inner tray designs with coved corners for easy cleaning.
- Insulation:** 50mm high density polyurethane foamed in place, Blowing agent, Cyclopentane for CFC free Ozone protection and superior insulating properties.
- Door:** Solid Stainless Steel outer, 50mm high pressure injected polyurethane foam. Designed with folded full length horizontal handle provides easy access.
Hinging: Self closing with a dwell open position for easy loading and

unloading.

Gasket: PVC welded one piece magnetic gasket. Removable without the need for tools.


- Castors:** 4 (2 x locking) x 75mm swivel heavy duty castors.

Details	ASP735	ASP1225	ASP1555
Volume (L)	184	340	440
Shelf Area (m ²)	1.3	2.42	2.79
Capacity (watts)	820	880	940


- Model Features:**
- Warranty¹:** Austwide's Manufacturers warranty 12 month parts and labour. See terms and conditions of sale for full description.
- Optional Extras:**
 - Additional Shelves.
 - Varying sized gastronorm pots.
 - Glass canopy.

ELEVATIONS. (not to scale)

¹.terms and conditions apply. Visit web site for full details. www.austwidesales.com.au
Specifications are subject to change without notice. E&OE.

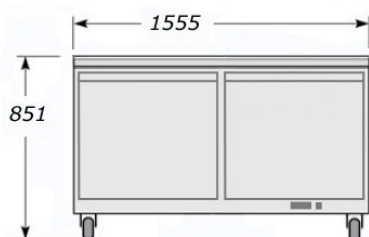

ELEVATION



RIGHT ELEVATION

NOTE: excluding the width all dimensions on the Elevations are common across the ABR Series.

Model	Width
ABR735	735mm
ABR1225	1225mm
ABR1555	1555mm

Head Office: Unit 1/35 Rimfire Drive ,Hallam, Vic 3803. Phone: 1800 813 987 Fax: 03 8786 3572
Email: sales@austwiderentals.com websites: www.austwidesales.com.au or austwiderentals.com