

# SHAMROCK



by

**Austwide**  
sales and rentals pty ltd

## AGN350:- SINGLE DOOR 1/1 GASTRONORM SERIES



**AGN350TN and AGN350BT**

### AGN350 Series

#### FEATURES:

- SHAMROCK 's AGN350 Series is available as a Refrigerator or Freezer.
- Only requires one a standard power point (GPO):- 240V 50Hz 10 amp.
- Digital Temperature Display.
- 4 height adjustable shelves per door. 1/1 Gastronorm size.
- Stainless steel AISI304 Construction inner and outer.
- Stainless steel internal floor with coved corners allows for easy cleaning and sanitizing.
- 60mm high pressure injected polyurethane foam.
- Extra Large castors, for ease of cabinet movement.
- Solid Door, Designed with one piece full length handle and self closing torsion bar hinging.
- Heavy duty one piece gasket, replaceable without tools.
- Automatic energy efficient hot gas condensate disposal. No drainage required.

#### MAIN DATA

Specifications are subject to change without notice. E&OE.

Model	Type	Doors	Volume (Net lts)	Shelves	Dimensions (mm) Width x Depth x height	Voltage	Cord Length	Shipping Weight
<b>AGN350TN</b>	Refrigerator 0°~4°C	1	350	4	490 x 740 x 2000	240v/50hz	2.4	138kg
<b>AGN350BT</b>	Freezer -16°~-20°C	1	350	4	490 x 740 x 2000	240v/50hz	2.4	158Kg

Head Office: Unit 1/35 Rimfire Drive ,Hallam, Vic 3803. Phone: 1800 813 987 Fax: 03 8786 3572  
Email: [sales@austwiderentals.com](mailto:sales@austwiderentals.com) websites: [www.austwidesales.com.au](http://www.austwidesales.com.au) or [austwiderentals.com](http://austwiderentals.com)

# SHAMROCK

by



## AGN350:- SINGLE DOOR 1/1 GASTRONORM SERIES

### Specification

- **Shelves:** 4 height adjustable, PVC coated, shelves per door.
- **Refrigeration System:** Fully balanced self contained condensing unit with forced draught evaporator and condenser.
- **Compressor:** SECOP, formerly Danfoss compressors.
- **Refrigerant:** R134A.
- **Defrost:** Timed electric defrost, with no-cost, hot gas condensate disposal.
- **Electronic Controller:** Italian designed and Manufactured, Dixell temperature controller.
- **Evaporator:** Epoxy coated to minimize the potential of corrosion and thus future gas leaks.
- **Operation conditions:** At up to 40° C ambient.
- **Electrical:** Units come ready for

connection to 240volt 50hz 10amp GPO. It is recommended that a dedicated GPO be used.


- **Construction:** 304 Stainless Steel interior and exterior.
  - **Insulation:** 60mm high density polyurethane foamed in place, blowing agent, cyclopentane for CFC free Ozone protection and superior insulating properties.
  - **Door:** Constructed from 304 Stainless Steel with full length handle and fitted with a lock.
  - **Hinging:** Self closing torsion spring.
  - **Gasket:** PVC welded one piece magnetic gasket. Removable without the need for tools.
  - **Castors:** 4 (2 x locking) x 75mm swivel commercial castors.
  - **Model Features:** Digital Temperature readout.
- Warranty<sup>1</sup>:** Austwide's Manufacturers warranty 12 month parts and

labour. See terms and conditions of sale for full description.

- **Optional Extras:**
  - Additional Shelves.

ELEVATIONS. (not to scale)

1.terms and conditions apply. Visit web site for full details. [www.austwidesales.com.au](http://www.austwidesales.com.au)  
Specifications are subject to change without notice. E&OE.

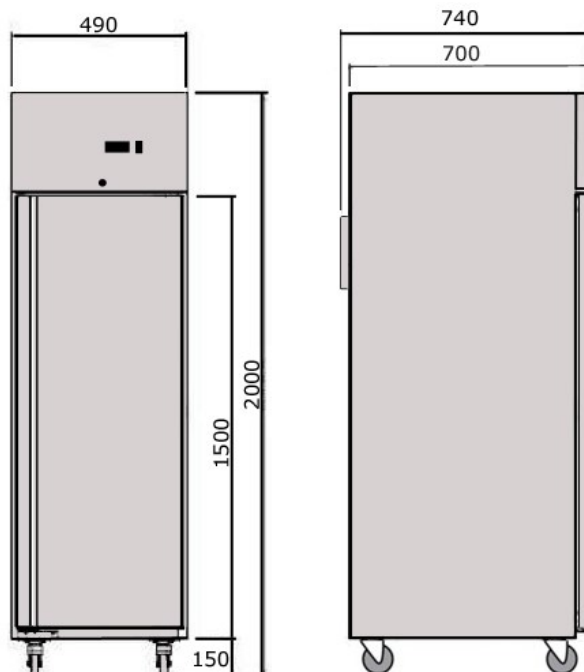

Head Office: Unit 1/35 Rimfire Drive ,Hallam, Vic 3803. Phone: 1800 813 987 Fax: 03 8786 3572  
Email: [sales@austwiderentals.com](mailto:sales@austwiderentals.com) websites: [www.austwidesales.com.au](http://www.austwidesales.com.au) or [austwiderentals.com](http://austwiderentals.com)