

SHAMROCK



by

Austwide
sales and rentals pty ltd

ASP:- SANDWICH PREP REFRIGERATOR SERIES



ASP Series

FEATURES:

- SHAMROCK 's SANDWICH PREP REFRIGERATORS are designed with the commercial kitchen in mind.
- Operating Temperature 0° to +5° C. Climate Type T.
- Only requires one a standard power point (GPO):- 240V 50Hz 10 amp.
- Digital Temperature Display.
- Height adjustable shelf per door. Individual shelves behind each door maximizes storage configurations.
- Stainless steel doors and outer sides. With powder coated aluminum inner walls and clear anodized aluminum outer back.
- Stainless steel internal floor with coved corners allows for easy cleaning and sanitizing.
- Stainless Steel insulated lids. Keep pans colder and minimizes condensation.
- Oversized (depth) full length nylon cutting board. Included. Easily removable for cleaning.
- Extra Large castors, for ease of cabinet movement.
- Solid Door, Designed with one piece full length horizontal handle and self closing torsion bar hinging.

MAIN DATA

Specifications are subject to change without notice. E&OE.

Model	Doors	Volume (Gross lts)	Shelves	Height (mm)	Width (mm)	Depth (mm)	Voltage	Power Outlet	Cord Length	Shipping Weight
ASP755	1	184	1	1080	735	770	240v/50hz	10amp	2.4	125kg
ASP1225	2	340	1	1080	1225	770	240v/50hz	10amp	2.4	142kg
ASP1555	2	438	1	1080	1555	770	240v/50hz	10amp	2.4	164Kg

Head Office: Unit 1/35 Rimfire Drive ,Hallam, Vic 3803. Phone: 1800 813 987 Fax: 03 8786 3572
Email: sales@austwiderentals.com websites: www.austwidesales.com.au or austwiderentals.com

SHAMROCK

by

Austwide
sales and rentals pty ltd

ASP:- SANDWICH PREP REFRIGERATOR SERIES

Outstanding Benefits

- Fitted with oversized Nylon cutting board, complete set of 1/6 gastronorm pots.
- Pot opening suits a varying size of gastronorm pots using dividers supplied. Hinged insulated flat covers.

Specification

- **Refrigeration System:** Fully balanced self contained condensing unit with forced draught evaporator.
- **Condensing unit:** Located at rear. Unit access from back of cabinet. Quality castors allow easy roll out of cabinet allowing access to condenser for easy cleaning and maintenance.
- **Refrigerant:** R134A.
- **Defrost:** Cyclic defrost, with no-cost, hot gas condensate disposal. Supplemented with timed defrosts via electronic controller.
- **Electronic Controller:** Italian designed and Manufactured, Dixell temperature controller. Includes high temp alarm.
- **Evaporator:** Epoxy coated to minimize the potential of corrosion and thus future gas leaks.
- **Shelves:** 2 height adjustable, PVC coated, shelves per door. 4 stainless steel shelf clips per shelf fit to

stainless steel shelf posts.

- **Operation conditions:** 0° to 5° C. at up to 38° C ambient.
- **Electrical:** Units come ready for connection to 240volt 50hz 10amp GPO. Single Outlet. It is recommended that a dedicated GPO be used.
- **Construction:** Stainless Steel doors, front and sides provide a clean and dent resistant cabinet. Clear anodized aluminum back. Interior white powder coated aluminum for a hygienic easy to clean surfaces.
- Stainless Steel inner tray designs with coved corners for easy cleaning.
- **Insulation:** 50mm high density polyurethane foamed in place, Blowing agent, Cyclopentane for CFC free Ozone protection and superior insulating properties. .
- **Door:** Solid Stainless Steel outer, 50mm high pressure injected polyurethane foam. Designed with folded full length horizontal handle provides easy access. Hinging: Self closing torsion spring. Gasket: PVC welded one piece magnetic gasket. Removable without the need for tools.
- **Castors:** 4 (2 x locking) x 75mm swivel heavy duty castors.

- **Model Features:** Digital Temperature readout.

Warranty¹: Austwide's Manufacturers warranty 12 month parts and labour. See terms and conditions of sale for full description.


Optional Extras:

- Additional Shelves.
- Varying sized gastronorm pots.
- Glass canopy.


Details	ASP700	ASP1225	ASP1555
Volume (L)	251	340	440
Shelf Area (m ²)	1.3	2.42	2.79
PANS (1/6Size)	6	12	16
Capacity (watts)	938	1583	1700

ELEVATIONS. (not to scale)

1.terms and conditions apply. Visit web site for full details. www.austwidesales.com.au
Specifications are subject to change without notice. E&OE.

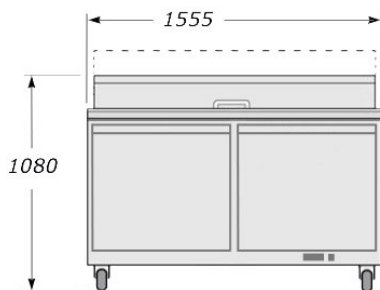

ELEVATION

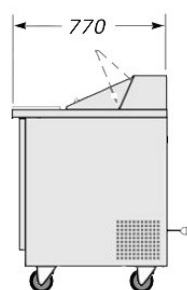

RIGHT ELEVATION

NOTE: excluding the width all dimensions on the Elevations are common across the ASP Series.

Model	Width
ASP700	735mm
ASP1225	1225mm
ASP1555	1555mm

Head Office: Unit 1/35 Rimfire Drive ,Hallam, Vic 3803. Phone: 1800 813 987 Fax: 03 8786 3572
Email: sales@austwiderentals.com websites: www.austwidesales.com.au or austwiderentals.com