



# G920:- TWO DOOR GLASS DOOR SERIES



### **G** Series

### FEATURES:


- An extra wide face. At 1370mm for increase facings.
- Operating Temperature o° to +5° C @ ambient temperature of 40° C
- Only requires one standard power point (GPO):- 240V 50Hz 10 amp.
- Digital Temperature Display.
- Individual adjustable shelves per door maximizing display configurations.
- Individual light switches to interior and signage plus
- Double glazed thermal insulated doors to reduce power consumption.
- Aluminium Framed doors with locks.
- Positive seal torsion bar self closing doors for low maintenance.
- *Lint Free* low maintenance condenser for increased maintenance intervals.
- Commercial castors, for ease of cabinet movement.
- Cyclic defrost with timed backup insures frost free refrigeration.
- Auto hot gas condensate removal requires no pumping.

#### MAIN DATA

#### Specifications are subject to change without notice. E&OE.

Model	Doors	Volume (Net lts)	Shelves	Dimensions (mm) Width x Depth x height	Voltage	Power Outlet	Cord Length	Shipping Weight
G420	1	412	4	680 x 720 x 2090	240v/50hz	10amp	2.4	138kg
G920	2	920	8	1370 x 720 x 2090	240v/50hz	3 amp	2.4	227kg

Head Office: Unit 1/35 Rimfire Drive ,Hallam, Vic 3803. Phone: 1800 813 987 Fax: 03 8786 3572 Email: sales@austwiderentals.com websites: www.austwidesales.com.au or austwiderentals.com





## G920:- TWO DOOR GLASS DOOR SERIES

#### Specification

- **Shelves:** 8 height adjustable, PVC coated, shelves per door. 4 stainless steel shelf clips per shelf fit to stainless steel shelf posts.
- Lighting: Florescent 36watt 1200mm tubes recessed into the inner walls provide high visibility lights. With low replacement cost.
- **Refrigeration System:** Fully balanced self contained condensing unit with forced draught evaporator and condenser.
- **Refrigerant:** R134A.
- **Defrost:** Cyclic defrost, with nocost, hot gas condensate disposal. Supplemented with timed defrosts via electronic controller.
- Electronic Controller: Italian designed and Manufactured, Dixell temperature controller.
- **Evaporator:** Epoxy coated to minimize the potential of corrosion and thus future gas leaks.
- **Operation conditions:** 0° to 5° C. at up to 40° C ambient.
- **Electrical:** Units come ready for connection to 240volt 50hz 10amp GPO. Single Outlet. It is recommended that a dedicated GPO be used.

1995

100 ]

- **Construction:** Corrosion resistant Pre-painted steel interior and exterior
- **Insulation:** 50mm high density polyurethane foamed in place, Blowing agent, Cyclopentane for CFC free Ozone protection and superior insulating properties. .
- **Door:** Low E double glazed thermal insulated toughened glass. Constructed with aluminium frame and fitted with locks.
- Hinging: Self closing torsion spring.
- **Gasket:** PVC welded one piece magnetic gasket. Removable without the need for tools.
- **Castors:** 4 ( 2 x locking) x 75mm swivel commercial castors.
- Model Features: Digital Temperature readout.
  Warranty<sup>1</sup>: Austwide's Manufacturers warranty 12 month parts and labour. See terms and conditions of sale for full description.

#### **Optional Extras:**

- Additional Shelves.
- Livery to sides and illuminated sign.


#### Outstanding Benefits


• Condensing unit: Bottom mounted

placing the unit in the coolest position, close to the floor, which puts less strain on the refrigeration system providing longer life and greater efficiency.

- Optimal product placement: The G920 lifts the product off the floor, placing it in the optimal position for your customers to easily reach in and retrieve without the need to stoop down excessively.
- **Energy Saving features:** LED lighting to interior. Individual light switches for illuminated sign and interior.

ELEVATIONS. (not to scale)



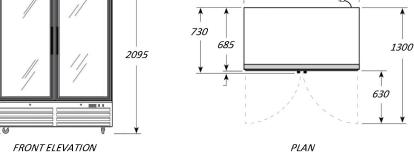

Head Office: Unit 1/35 Rimfire Drive ,Hallam, Vic 3803. Phone: 1800 813 987 Fax: 03 8786 3572 Email: sales@austwiderentals.com websites: www.austwidesales.com.au or austwiderentals.com