



GFG:- GLASS DOOR 1/1 GASTRONORM BENCH REFRIGERATOR SERIES







GFGSeries

FEATURES:

- SHAMROCK 's GFG Glass Door Refrigerators are designed to accept 1/1 gastronorm trays.
- Operating Temperature o° to +5° C.
 Climate Type N.
- Only requires one a standard power point (GPO):- 240V 50Hz 10 amp.
- Digital Temperature Display.
- 1 height adjustable shelf per door.
- Stainless steel fascia and outer sides and clear anodized aluminum outer back..
- Stainless Steel inner.
- Stainless Steel work top with bull nose front edge.
- Internal floor with coved corners allows for easy cleaning and sanitizing.
- Extra Large castors, for ease of cabinet movement.
- Double Glazed Glass Door, Designed with horizontal handle and self closing torsion bar hinging.

MAIN DATA

Specifications are subject to change without notice. E&OE.

| Model | Doors | Volume (Gross lts) | Shelves | Width (mm) | Depth (mm) | Height (mm) | Voltage | Power Outlet | Cord Length | Shipping Weight |
|----------|-------|-----------------------|---------|---------------|---------------|----------------|-----------|-----------------|----------------|--------------------|
| GFG1365G | 2 | 314 | 2 | 1365 | 700 | 860 | 240v/50hz | 10amp | 2.4 | 113kg |
| GFG1800G | 3 | 465 | 1 | 1795 | 700 | 860 | 240v/50hz | 10amp | 2.4 | 151kg |
| GFG2200G | 4 | 616 | 1 | 2230 | 700 | 860 | 240v/50hz | 10amp | 2.4 | 173Kg |

Head Office: Unit 1/35 Rimfire Drive ,Hallam, Vic 3803. Phone: 1800 813 987 Fax: 03 8786 3572 Email: sales@austwiderentals.com websites: www.austwidesales.com.au or austwiderentals.com





GFG:- GLASS DOOR 1/1 GASTRONORM BENCH REFRIGERATOR SERIES

Specification

- Refrigeration System: Fully balanced self contained condensing unit with forced draught evaporator.
- Condensing unit: Left hand side.
 Unit access from front thru hinged cover. Condenser fitted with filter for easy cleaning.
- Refrigerant: R134A.
- Defrost: Cyclic defrost, with nocost, hot gas condensate disposal. Supplemented with timed defrosts via electronic controller.
- Electronic Controller: Italian designed, Dixell temperature controller and digital display. Includes high temp alarm.
- Evaporator: Epoxy coated to eliminate the potential of corrosion and thus future gas leaks.
- Shelves: 1 height adjustable, PVC coated, shelf per door. Fitted on stainless steel tray slides.
- Operation conditions: 0° to 5° C. at up to 32° C ambient.
- **Electrical:** Units come ready for

connection to 240volt 50hz 10amp GPO. Single Outlet. It is recommended that a dedicated GPO be used.

- Construction: Stainless Steel doors, front and sides provide a clean and dent resistant cabinet. Clear anodized aluminum back.
- Inner: Stainless Steel inner with inner tray designs with coved corners for easy cleaning.
- Insulation: 50mm high density polyurethane foamed in place, Blowing agent, Cyclopentane for CFC free Ozone protection and superior insulating properties.
- Door: Double glazed Low E glass doors with aluminum frame. Hinging: Self closing with a dwell open position for easy loading and unloading.
- Gasket: PVC welded one piece magnetic gasket. Removable without the need for tools.
- **Castors:** 4 (2 x locking) x 75mm swivel heavy duty castors.
- Warranty¹: Austwide's Manufactur-


ers warranty 12 month parts and labour. See terms and conditions of sale for full description.


Options

- Available with solid doors.
- Additional Shelves
- Additional tray slides

ELEVATIONS. (not to scale)

1.terms and conditions apply. Visit web site for full details. www.austwidesales.com.au Specifications are subject to change without notice. E&OE.



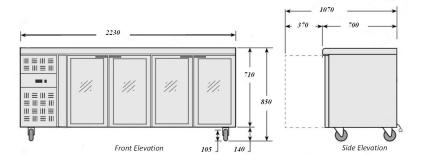

Head Office: Unit 1/35 Rimfire Drive ,Hallam, Vic 3803. Phone: 1800 813 987 Fax: 03 8786 3572 Email: sales@austwiderentals.com websites: www.austwidesales.com.au or austwiderentals.com